
Instruction of related parts

| Installation steps:

4 Desktop installation




A:Turn over the desktop module and lay it on the protective mat, then remove the screws.



B:Fix the handle with 10 M4 screws (P/N:52-00789-00) and hooks with 12 M3 screws(P/N:52-00783-00).




C:Put the desktop support on the column module, fix it with 10 M5 screws(P/N:52-00978-00).




D:Install the desktop with 12 M4 screws (P/N:52-00789-00).

5 Main Unit installation



A:Lay down the main unit on the desktop.



B:Rotate the support close to the main unit, fix the 4 M3 screws(P/N:52-01420-00) to fix the main unit.






- 1. Height adjustable 0-50-100mm by manual adjustment(see step 3).
- 2. View Angel of LCD screen adjustable 0-10 degrees.
- 3. The position of printer shelf and basket could be adjusted according to user's habit.

Basket

Column Module
Chassis Module

4. The casters are universal wheels and can be rotated in 360 degrees, the 2 front casters are with brakes.

AC Power Input Socker

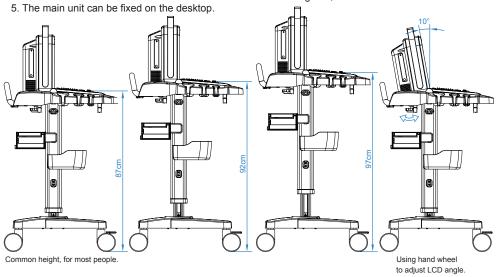

Please visit http://www.chison.com.cn for more information or contact with our service dapartment by tel.: 0086-510-85311707 and email: expert@chison.com.cn


Check the number of components according to the following list before installation.


Item	Name	Q'ty	Remark	P/N
	Chassis module	1		91-60509-00
2)	Printer shelf	1		91-60415
3/	Caster	4	2 with brakes 2 without brakes	52-00204-00 (with brakes) 52-00206-00 (without brakes)
4)	Hook	4		52-00386-00
5)	Desktop	1		91-60511-00
6)	Spanner	1	For casters	52-01260-00
7) &	Screw M4	27		52-00789-00
8)	Screw M3	12		52-00783-00


Item	Name	Q'ty	Remark	P/N
9)	Handle	1		52-01169-00
10	Column module	1		91-60510-00
11)	Hand wheel	1		91-60577-00
12)	Basket	1		51-00699-00
13)	Desktop Support	1		52-01168-00
14 /	Screw M3	4	Connect Main Unit	52-01420-00
15 /	Screw M5	14		52-00978-00
16	Screw Driver	1	For Screw M5	45-00045-00

X Installation steps:

1 Casters installation









B:Install the casters using the attached spanner. 2 casters with brakes are fixed in the front.

2 Column module installation

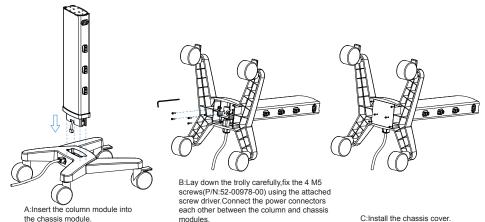

3 Column height adjustment (option)

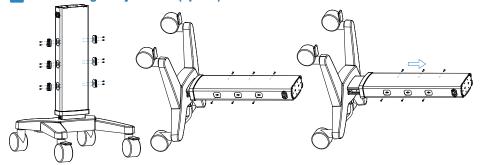

A:Remove the hooks from the column module.

B:Lay down the trolly,remove the screws connected inner and outer column.

C:Draw out the outer column slowly about 50mm,fix the screws just removed. Install the hooks back to column again (3 levels:0-50-100mm).